


REV	DATE	REV. DIMENSION	DRAW	CHECK	APPROVE
▲	06.01.24	New Drawing	Liya		

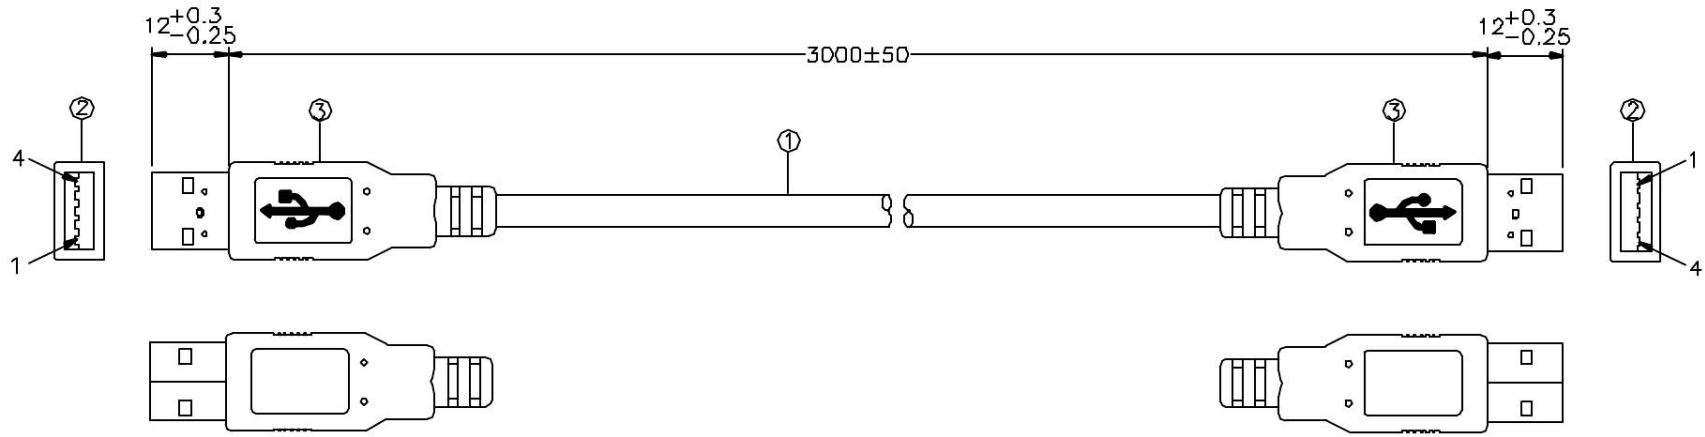


Conn.1 USB A Male Molding

Conn.2 USB A Male Molding

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance: 2 ohm max
- 3.Insulation Resistance: 10M ohm min
- 4.Hi-pot: 300V DC/10ms

Pin Assignment

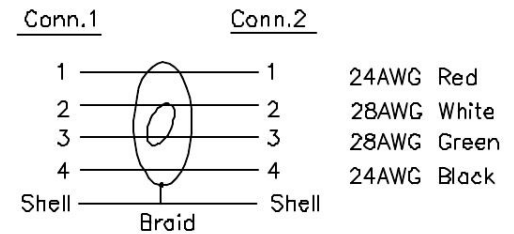

③	R90-45003	Outer Molded: 45P PVC Color:296U	12/1K	KG
②	R79-04127	USB A Male Solder Type 5U" Insulation Black	2	SET
①	61-04706	USB2.0 28AWGx1T/P+24AWGx2C+AL/MY+DW+BD Jacket Color:296U OD:φ4.4±0.15	3	M
NO	PART NO	DESCRIPTION	Q'TY	UNIT

<b>BAFO</b> <sup>®</sup> TECHNOLOGIES		RoHS Compliant			
		DESCRIPTION USB2.0-MM-3M04A 13-2CD3			
		PART NO 210404041820			
DRAW		DWG. NO		REV.	A
CHECK		DATE	2006.01.24	SCALE	NONE
APP.		SIZE	A4	UNIT	mm
		SHEET	1/1		