


Specification

1. Current carrying capacity: 20V DC 7.5A max.
2. Contact resistance: 30mΩ max.
3. Insulation resistance: DC 250V 50MΩ min.
4. Voltage withstand: AC 250V / 1 minute
5. Insertion force: 3.5kgs max.
6. Withdrawal force: 0.5-2.5Kgs

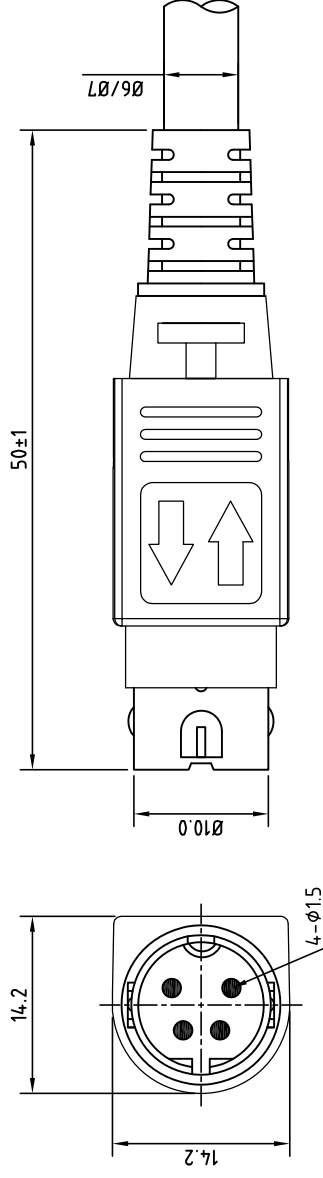

RoHS

LEAD FREE

TOLERANCE .X±0.25 .XX±0.10



ITEM Circular Power Connector Push Lock Type

7	Trail	PVC	UL94V-0
6	Spring	Steel	
5	Cover	Brass	Nickel Ptd.
4	Terminal+plastic core	Brass/PBT	Silver Ptd. UL94V-0
3	Plastic ring	POM	
2	Body B	PC	UL94V-0
1	Body A	PC	UL94V-0
Item	Description	Material	Treat
02-16-2011		PART NO.	5101-4PW
GINA		REV.	1
KATY			
MM			

DATE
DWN
CHK
UNIT

NOTE: REV.0 NEW; REV.1 spec. revise