SPECIFICATIONS

Rating: 100V AC 1A Max.
12V DC 2A Max.
Insulation Resistance: 50 Megohms Min. At 250V DC
Dielectric Strength: 250V AC/1 Minute
Contact Resistance: 30 Milliohms Max.
A.Metal: Copper,Nickel Plated
B.Insulator: PC
C.Pin Contact: Copper,Silver Plated



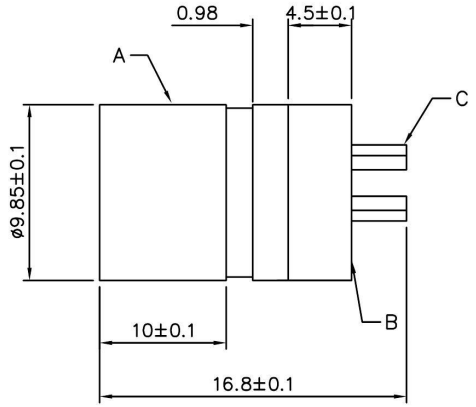

3	4	5	6	7	8
MDM03S	MDM04S	MDM05S	MDM06S	MDM07S	MDM08S
					

Spectra Connectronics Pvt. Ltd. HOUSE OF CONNECTORS™	CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.1 .XX ±0.05 ANG.				
	PART No. 51 02 XX ML		CHECKED BY						
	DRAWING No.		DRAWING BY						
	SCALE	NONE	REV.	A0	UNIT mm	0	A0	NEW RELEASE	03/18/2005
						NO.	REV.	REVISIONS	CHK DATE