

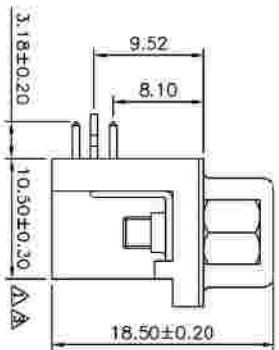
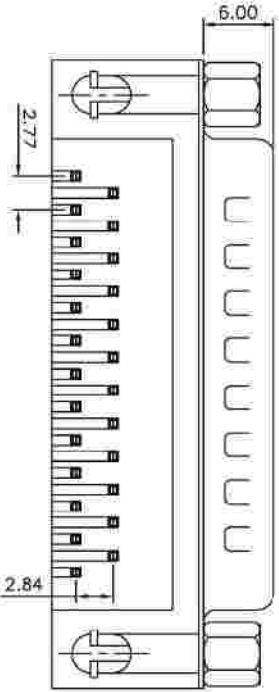


SPECIFICATIONS
 Current Rating: 5amps
 Withstanding Voltage: 1000V(One Minute)
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Operating Temperature: -50°C~+105°C
 Shell: Steel, Nickel Finished
 Insulator: P.B.T+30% Glass Fiber(UL94V-0)
 Contact Material: Brass
 Contact Finish: Gold Flash On Contact Area,
 Tin Plated On Solder Tail, Under Plated Nickel
 RoHS Compliant!

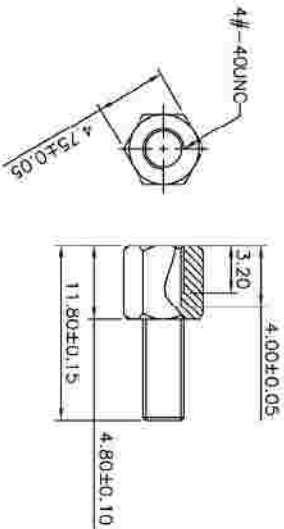

Pin	A	B	C
9	30.80	25.00	16.92
15	39.20	33.30	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

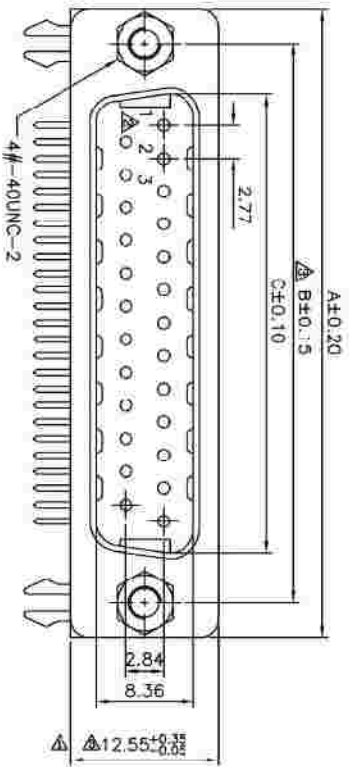

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	REVISIONS	DATE
PART No. 70 07 XX	CHECKED BY	.X ±0.25 .X ±.3°	A3	12/25/2008
DRAWING No.	DRAWING BY	.XX ±0.15 .XX ±1°	A2	09/01/2008
SCALE NONE	REV. A3	.XXX ±0.05 .XXX ±0.5°	A1	05/11/2007
			A0	10/23/2006
			NO REV.	