

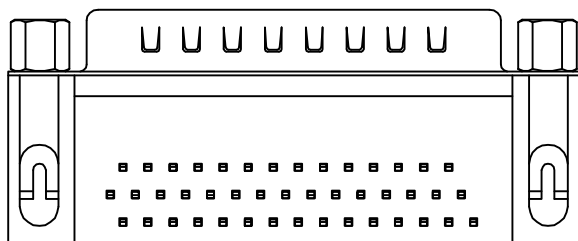
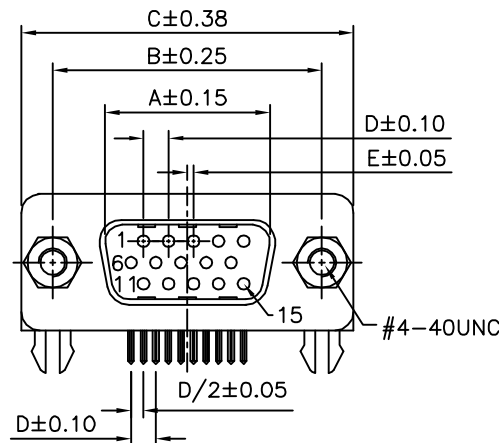




**SPECIFICATION**  
 Current Rating:1 Amps  
 Withstand Voltage:1000V For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC  
 Operation Temperature:-50°C~+105°C  
 Shell:SPCC,Nickel Plated  
 Screw:12L14,Nickel Plated  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash On Contact Area,Tin  
 Plated On Solder Tails,Over Nickel  
 Boardlock:SPCC,Tin Plated  
 RoHS Compliant

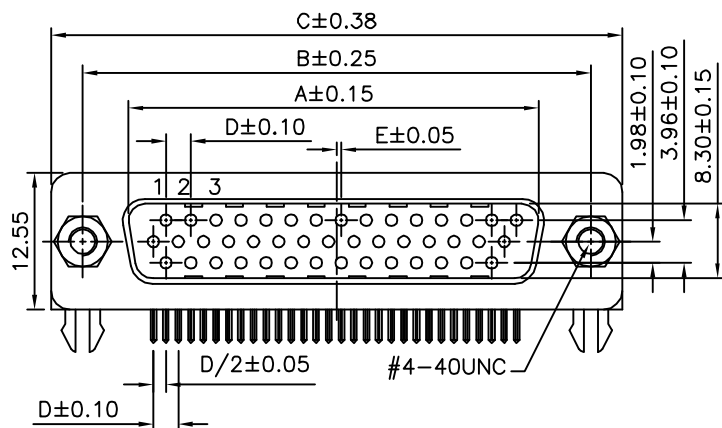

26,44,62 Pin



15 Pin

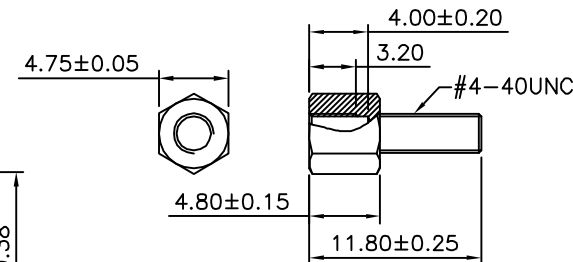

Pin	A	B	C	D	E
15	16.92	24.99	30.81	2.29	0.25
26	25.25	33.32	39.20	2.29	0.50
44	38.96	47.04	53.04	2.29	0.50
62	55.42	63.50	69.40	2.41	0.60



CATEGORY		APPROVED BY	
PART No. 7007-XX HD		CHECKED BY	
DRAWING No.		DRAWING BY	
SCALE	NONE	REV.	B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38 .X\* ±3\*  
 .XX ±0.25 .XX\* ±1\*  
 .XXX ±0.05 .XXX\* ±0.5\*

NO. REV.	B0	NEW RELEASE	HZF	05/26/2015
		REVISIONS	CHK	DATE