





**SPECIFICATION**

Current Rating:5 Amp  
 Withstanding Voltage:1000V(1 Minute)  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Operating Temperature:-50°C~+105°C  
 Shell:SPCC,Nickel Plated  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Flash On Contact Area,  
 Tin Plated On Solder Tail,Under Nickel  
 Z Flake:SPCC,Tin Plated  
 Screw:12L14,Nickel Plated  
 RoHS Compliant

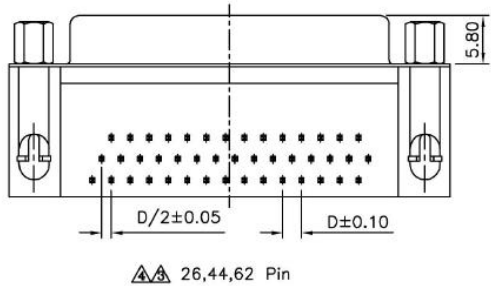

Pin.	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.80	33.32	39.20	2.29	0.50
44	38.38	47.04	53.04	2.29	0.50
62	54.84	63.50	69.40	2.41	0.60

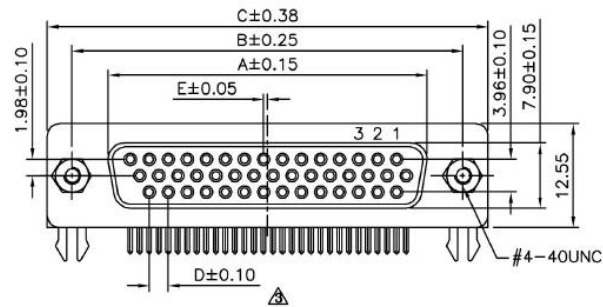

CATEGORY		APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	A4	Modify Data	07/18/2011
PART No. 70 08 XX HD		CHECKED BY	.X ±0.38 .X* ±3*	A3	Modify Data	12/20/2010
DRAWING No.		DRAWING BY	.XX ±0.25 .XX* ±1*	A2	Modify Data	09/09/2009
SCALE NONE		REV.	.XXX ±0.05 .XXX* ±0.5*	A1	Add 62 Pin	10/29/2007
			UNIT mm	A0	NEW RELEASE	02/16/2007
				NO.REV.	REVISIONS	DATE