

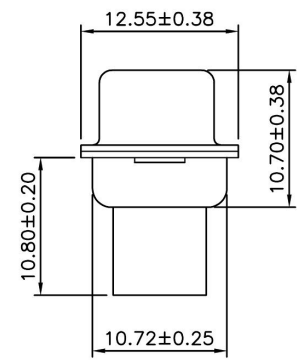


SPECIFICATION

Dielectric Withstanding Voltage:500 V AC Min
 Insulation Resistance:1000 Megaohms Min
 Temperature Rating:-55°C~+105°C
 Insulator:PBT Thermoplastic,30% Glass Filled,UL 94V-0 Rated,Black Color
 Shell:Steel,Nickel Finished
 RoHS Compliant

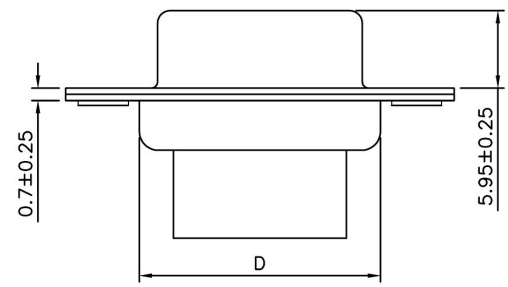

Contact	A ±0.25	B ±0.13	C ±0.38	D ±0.25
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71

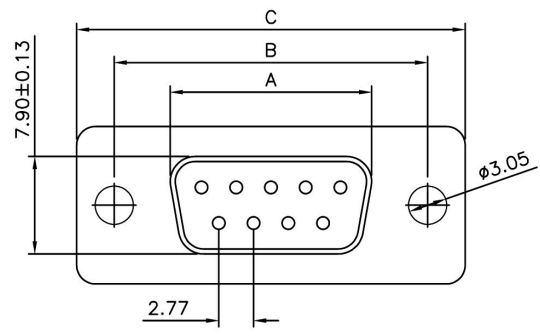

CATEGORY D-Sub Individual Crimp		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .XX ±0.13 AGE ±2*
PART No. 7010-XX		CHECKED BY		
DRAWING No. 7010-XX		DRAWING BY		
SCALE	NONE	REV.	A0	
		UNIT mm		

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	04/27/2008
		REVISIONS		