

D-SUB CONNECTOR LONG TAIL STRAIGHT DIP TYPE " PLUG "MACHINED PIN  
TAIL HIGH 17.5mm

MATERIAL & FINISH

SHELL: STEEL, TIN PLATED

PIN CONTACT:

BRASS  
GOLD PLATED OVER NICKEL

INSULATOR:

PBT & GLASS-FIBRE REINFORCED

NUMBER OF CONTACT:

9, 15, 25, 37

CURRENT RATING:

5 AMP

DIELECTRIC STRENGTH:

1000V FOR ONE MINUTE


INSULATOR RESISTANCE:

1000Ω MIN. at 500V DC

TEMPERATURE:

-55°C ~ +105°C

| ITEM NO   | A     | B     | C     | D     | E   | F  | G    |
|-----------|-------|-------|-------|-------|-----|----|------|
| 9DP-28.5  | 16.92 | 24.99 | 30.81 | 19.28 | 1.2 | 11 | 17.5 |
| 15DP-28.5 | 25.25 | 33.32 | 39.14 | 27.51 | 1.2 | 11 | 17.5 |
| 25DP-28.5 | 38.96 | 47.04 | 53.04 | 41.3  | 1.2 | 11 | 17.5 |
| 37DP-28.5 | 55.42 | 63.50 | 69.32 | 57.71 | 1.2 | 11 | 17.5 |

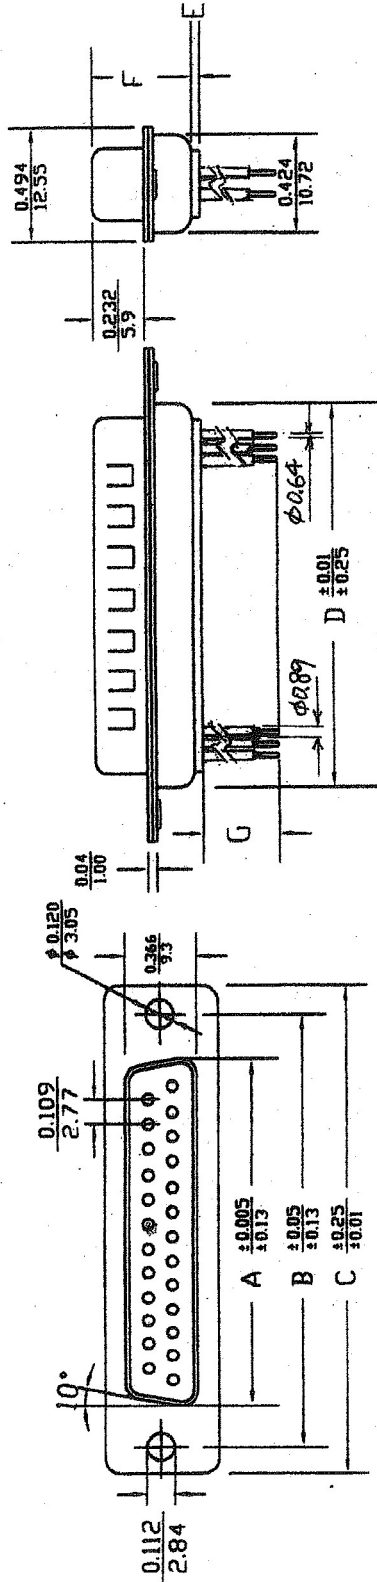

**Spectra** *Connectronics Pvt. Ltd.*  
HOUSE OF CONNECTORS®

TITLE: D-SUB CONN. LONG TAIL 17.5 mm

| REVISIONS | APPROVED BY |  |
|-----------|-------------|--|
|           | DATE        |  |
|           | 2/15/2012   |  |

| REVISIONS | ENGINEER BY | SCALE    | DRAWING NO. | REVISIONS  | JOB NO. |
|-----------|-------------|----------|-------------|------------|---------|
|           | Tomy        |          |             |            |         |
|           | CHECKED BY  | APPROVAL | DATE        | TOLERANCES | UNIT    |
|           |             |          |             |            | mm      |

1 2 3 4 5