


D-SUB FEMALE SOCKET CONNECTOR LONG TAIL STRAIGHT DIP TYPE MACHINED CONTACT
TAIL HIGH 17.5mm

MATERIAL & FINISH
SHELL: STEEL, TIN PLATED
PIN CONTACT:
BRASS
GOLD PLATED OVER NICKEL
INSULATOR:
PBT & GLASS-FINRE REINFORCED
NUMBER OF CONTACT:
9, 15, 25, 37
CURRENT RATING:
5 AMP.
DIELECTRIC STRENGTH:
1000V FOR ONE MINUTE
INSULATOR RESISTANCE:
1000M Ω MIN. at 500V DC
TEMPERATURE:
-55°C ~ +105°C

ITEM NO	A	B	C	D	E	F	G
9DS-28.2	16.33	24.99	30.81	19.28	1.2	11	17.5
15DS-28.2	24.66	33.32	39.14	27.51	1.2	11	17.5
25DS-28.2	38.38	47.04	53.04	41.3	1.2	11	17.5
37DS-28.2	54.84	63.50	69.32	57.71	1.2	11	17.5

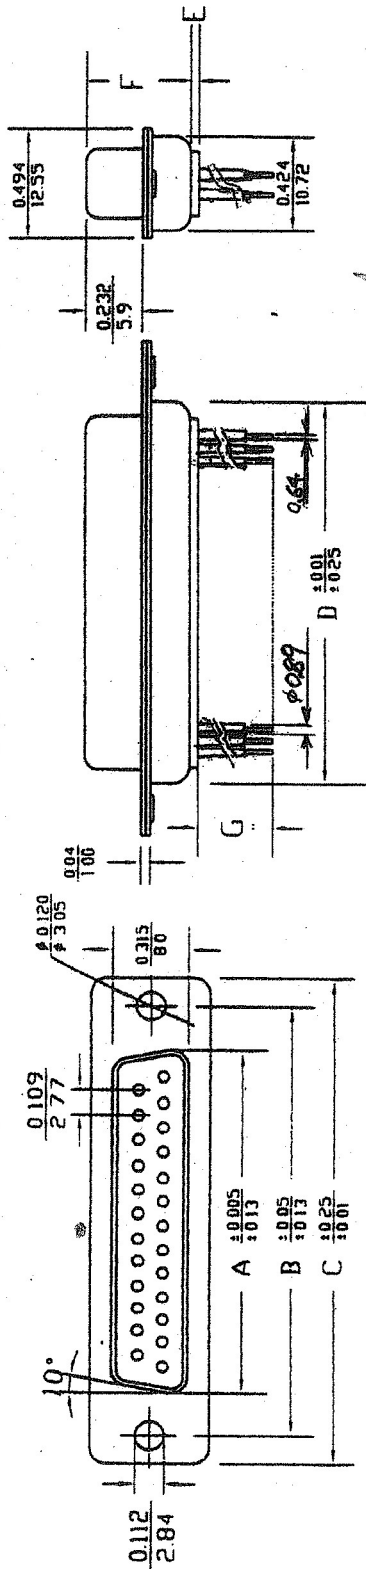

Spectra *Connectronics Pvt. Ltd.*
HOUSE OF CONNECTORS®

DESCRIPTION: 2/15/2012

TITLE: D-SUB Conn. Long Tail, 17.5 mm

REVISIONS	DRAWN BY	ENGINEER BY	SCALE	DRAWING NO.	REVISIONS	JOB NO.
	Tommy					
	CHECKED BY	APPROVAL	DATE	Sheet ___ of ___		