


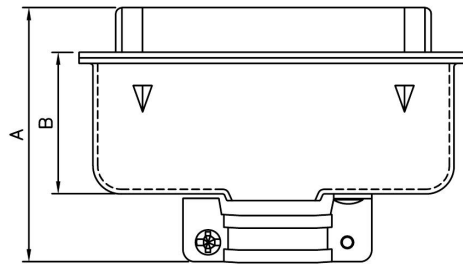


△ SPECIFICATION

Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At DC 500V
 Temperature Range:-55°C~+105°C
 RoHS Compliant

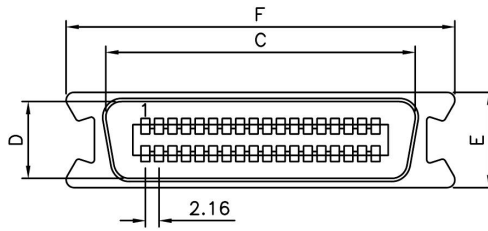

△ Circuit	A±0.20	B±0.20	C±0.20	D±0.20	E±0.20	F±0.20
14	41.40	21.20	25.60	12.25	15.20	38.80
24	41.40	21.20	36.47	12.25	15.20	49.30
36	40.50	22.60	49.35	12.25	15.20	62.00
50	45.50	24.80	64.47	12.25	15.20	77.40

Spectra Connectronics Pvt. Ltd.
 HOUSE OF CONNECTORS™

CATEGORY		APPROVED BY	
PART No. 7019 XX		CHECKED BY	
DRAWING No.		DRAWING BY	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.3
 .XX ±0.20
 .XXX ±0.100
 ANG. ±1°

UNIT mm

NO.	REV.	REVISIONS	DATE
△ A1		Modify Data	05/17/2010
△ A0		NEW RELEASE	