

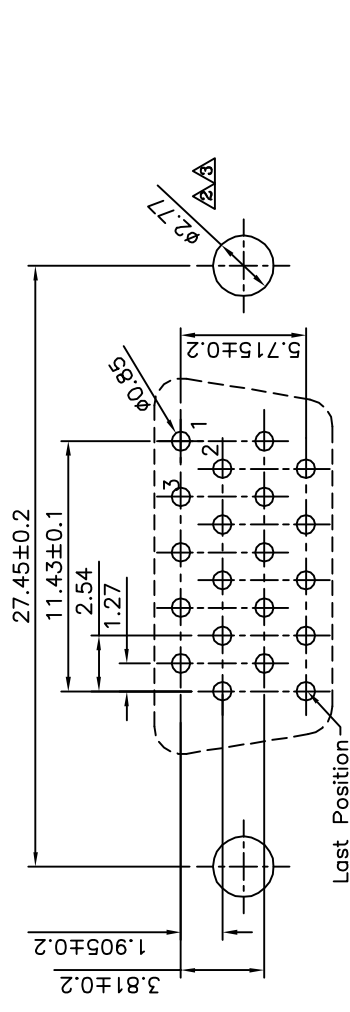
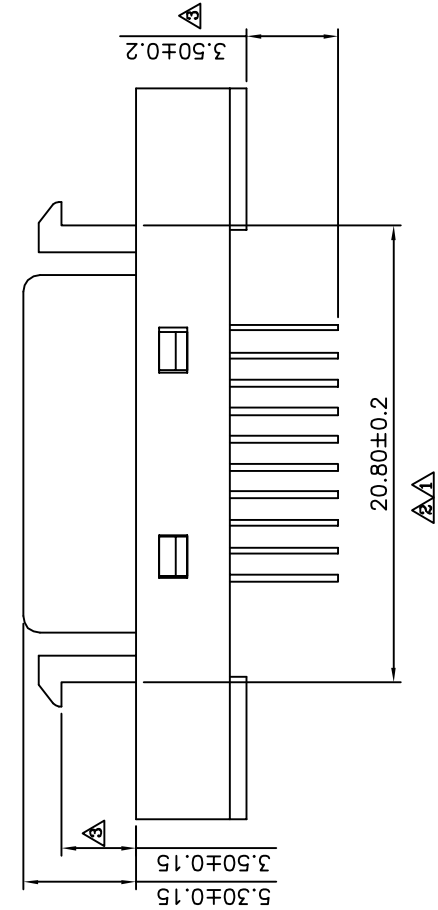


△△ SPECIFICATION

Current Rating: 0.5 Amp
 Withstand Voltage: 500V AC
 Contact Resistance: 35 Milliohms Max.
 Insulation Resistance: >500 Megaohms Min.
 Operation Temperature: -55°C ~ +85°C
 Insulator: PBT (UL94V-0), Black
 Contact: Phosphor Bronze, Selective Gold Plated 5u" Over Nickel
 Front Shell: Steel, Nickel Plated Over Copper
 Bracket: Zinc Alloy, Nickel Plated Over Copper
 RoHS Compliant

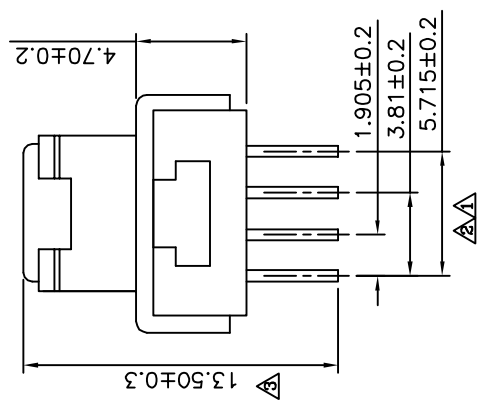

△ Recommended P.C.B. Layout

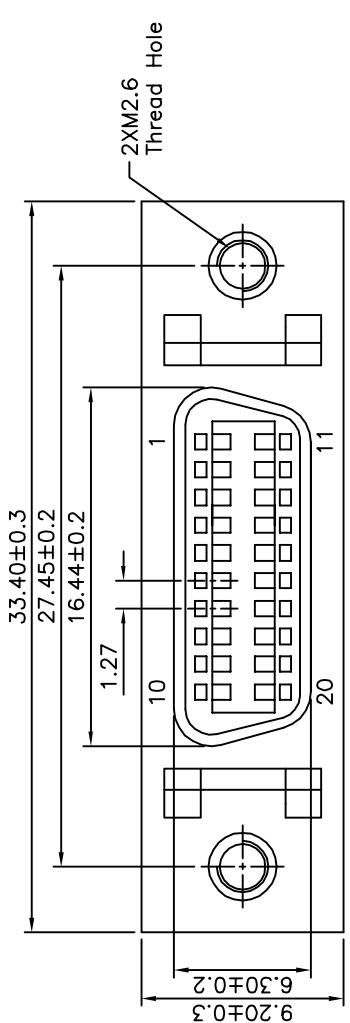

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		A3 Modify Data		09/24/2013	
PART No.		CHECKED BY		.X ±0.38		A2 Modify Data		10/21/2011	
DRAWING No.		DRAWING BY		.XX ±0.25		A1 Modify Data		11/19/2009	
SCALE		REV.		UNIT		NO. REV.		DATE	
NONE		A3		mm		AD NEW RELEASE		CHK	
5		6		9		8		REVISIONS	
4		3		2		1		0	

