



| | |
|--------------|----------|
| HD15PIN T/N: | D-073(B) |
| Ferrite T/N: | F-001 |

| REV | DATE | REV.DIMENSION | DRAW | CHECK | APPROVE |
|-----|----------|---------------|------|-------|---------|
| △ | 05.11.11 | NEW DRAWING | XHJ | | |

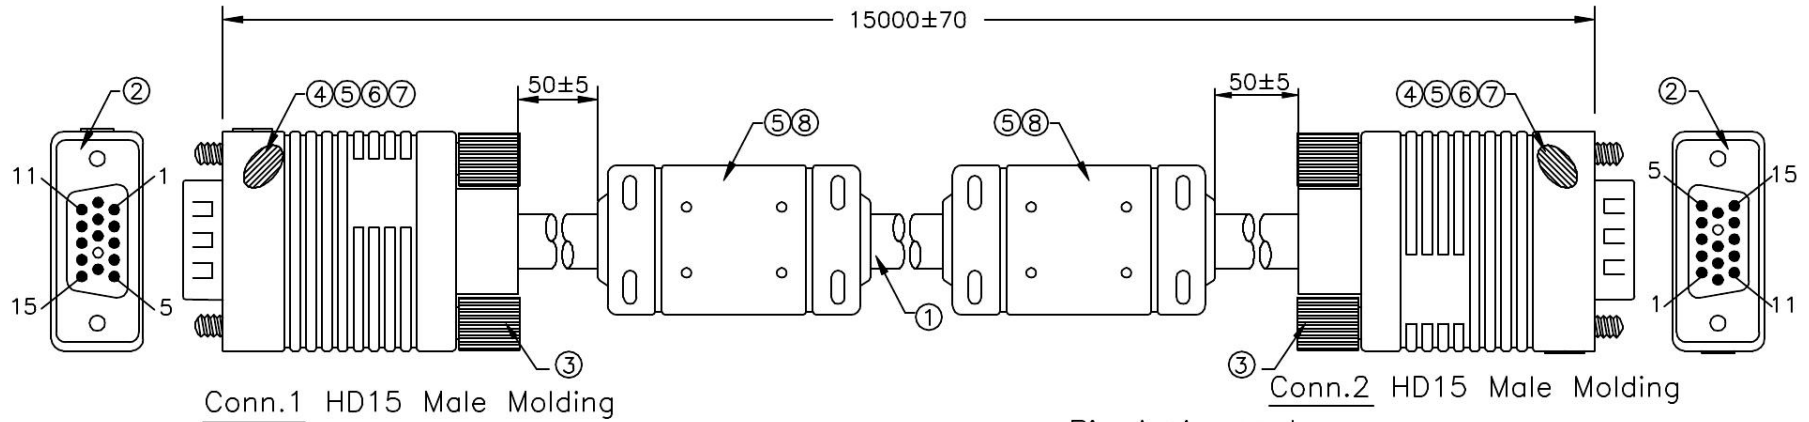

Pin Assignment

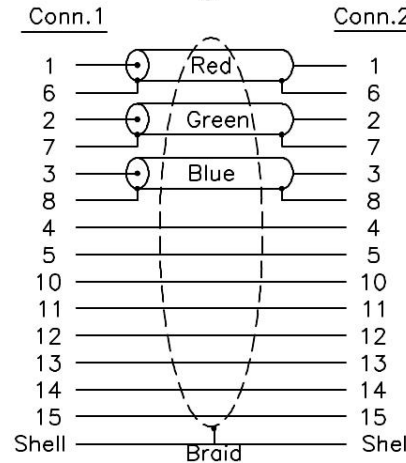

Electronic Test :

- 1.100% Test (Open,Short,Miss Wire)
2. Contact Resistance : 10 ohm max
3. Insulation Resistance : 10M ohm min
4. Hi-Pot : 300V DC/10ms

| NO. | P/N | DESCRIPTION | Q'TY | UNIT |
|-----|-----------|---|---------|------|
| ⑧ | R87-01001 | Ferrite Core 17.5*9.5*28.5 | 2 | pcs |
| ⑦ | R87-04005 | Copper Foil 360° Solder w=3.2cm | 12/100 | m |
| ⑥ | R87-04002 | Copper Foil 360° Solder w=0.7cm | 9/100 | m |
| ⑤ | R90-45006 | Outside Molding 45P PVC PMS:Black 3u2x | 72/1000 | kg |
| ④ | R91-01001 | Inside Molding PE | 10/1000 | kg |
| ③ | R86-20043 | Screw 40.5mm #4-40 Color:Black 3u2x | 4 | pcs |
| ② | R71-15016 | HD15P Male Solder Type (Missing 9P) Blue | 2 | pcs |
| ① | 61-11028 | UL2919 28AWG*3Coax+24AWG*8C+AL/MY+DW+BD Jacket Color PMS:Black 3u2x OD:8.5±0.15 | 15 | m |
| NO. | P/N | DESCRIPTION | Q'TY | UNIT |

| DESCRIPTION | | RoHS Compliant | | | |
|------------------------------------|---------|----------------|-------|------|-----------|
| 15M-HD15M-HD15M M42MM-15M11A-2F | | | | | |
| PART NO. | | 21151511170 | | | |
| DRAW | DWG NO. | REV | A | | |
| CHECK | DATE | 05.11.11 | SCALE | NONE | |
| APP | SIZE | A4 | UNIT | mm | SHEET 1/1 |