
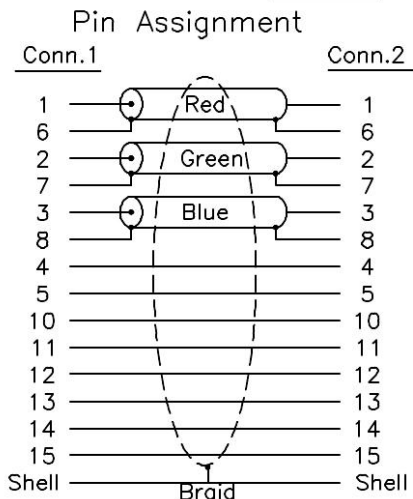


HD15PIN T/N:	D-073(B)
Ferrite T/N:	F-001

REV	DATE	REV.DIMENSION	DRAW	CHECK	APPROVE
△	05.11.11	NEW DRAWING	XHJ		

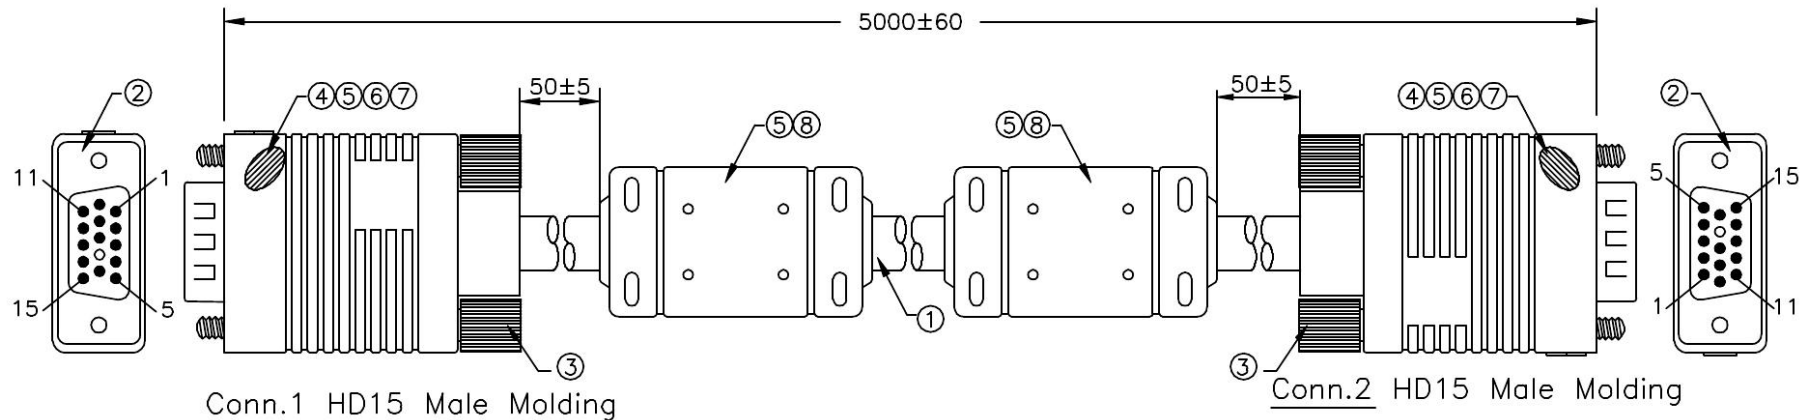

Electronic Test :

- 1.100% Test (Open,Short,Miss Wire)
2. Contact Resistance : 5 ohm max
3. Insulation Resistance : 10M ohm min
4. Hi-Pot : 300V DC/10ms

NO.	P/N	DESCRIPTION	Q'TY	UNIT
⑧	R87-01001	Ferrite Core 17.5*9.5*28.5	2	pcs
⑦	R87-04005	Copper Foil 360° Solder w=3.2cm	12/100	m
⑥	R87-04002	Copper Foil 360° Solder w=0.7cm	9/100	m
⑤	R90-45006	Outside Molding 45P PVC PMS:Black 3u2x	72/1000	kg
④	R91-01001	Inside Molding PE	10/1000	kg
③	R86-20043	Screw 40.5mm #4-40 Color:Black 3u2x	4	pcs
②	R71-15016	HD15P Male Solder Type (Missing 9P) Blue	2	pcs
①	61-11028	UL2919 28AWG*3Coax+24AWG*8C+AL/MY+DW+BD Jacket Color PMS:Black 3u2x OD:8.5±0.15	5	m

		DESCRIPTION	RoHS Compliant			
		DESCRIPTION	5M-HD15M-HD15M M42MM-5M11A-2F			
		PART NO.	21151511167			
DRAW		DWG NO.		REV	A	
CHECK		DATE	05.11.11	SCALE	NONE	
APP		SIZE	A4	UNIT	mm	SHEET 1/1