SPECIFICATION
Dielectric Withstanding Voltage:500 V AC Min
Insulation Resistance:1000 Megaohms Min
Temperature Rating:−55°C~+105°C
Insulator:PBT Thermoplastic,30% Glass Filled,UL 94V−0 Rated,Black Color
Shell:Steel,Nickel Finished
RoHS Compliant

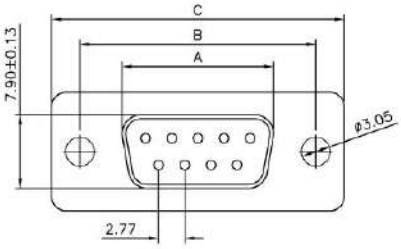

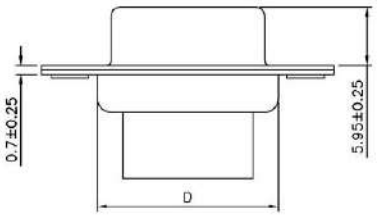



Contact	A ±0.25	B ±0.13	C ±0.38	D±0.25
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71

Spectra Connectronics Pvt. Ltd.
HOUSE OF CONNECTORS™

CATEGORY		APPROVED BY	
PART No.	70 10 XX	CHECKED BY	
DRAWING No.		DRAWING BY	
SCALE	NONE	REV.	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.XX ±0.13
AGE ±2°
UNIT mm

NO.	REV.	REVISIONS	DATE
1	A0	NEW RELEASE	04/27/2008