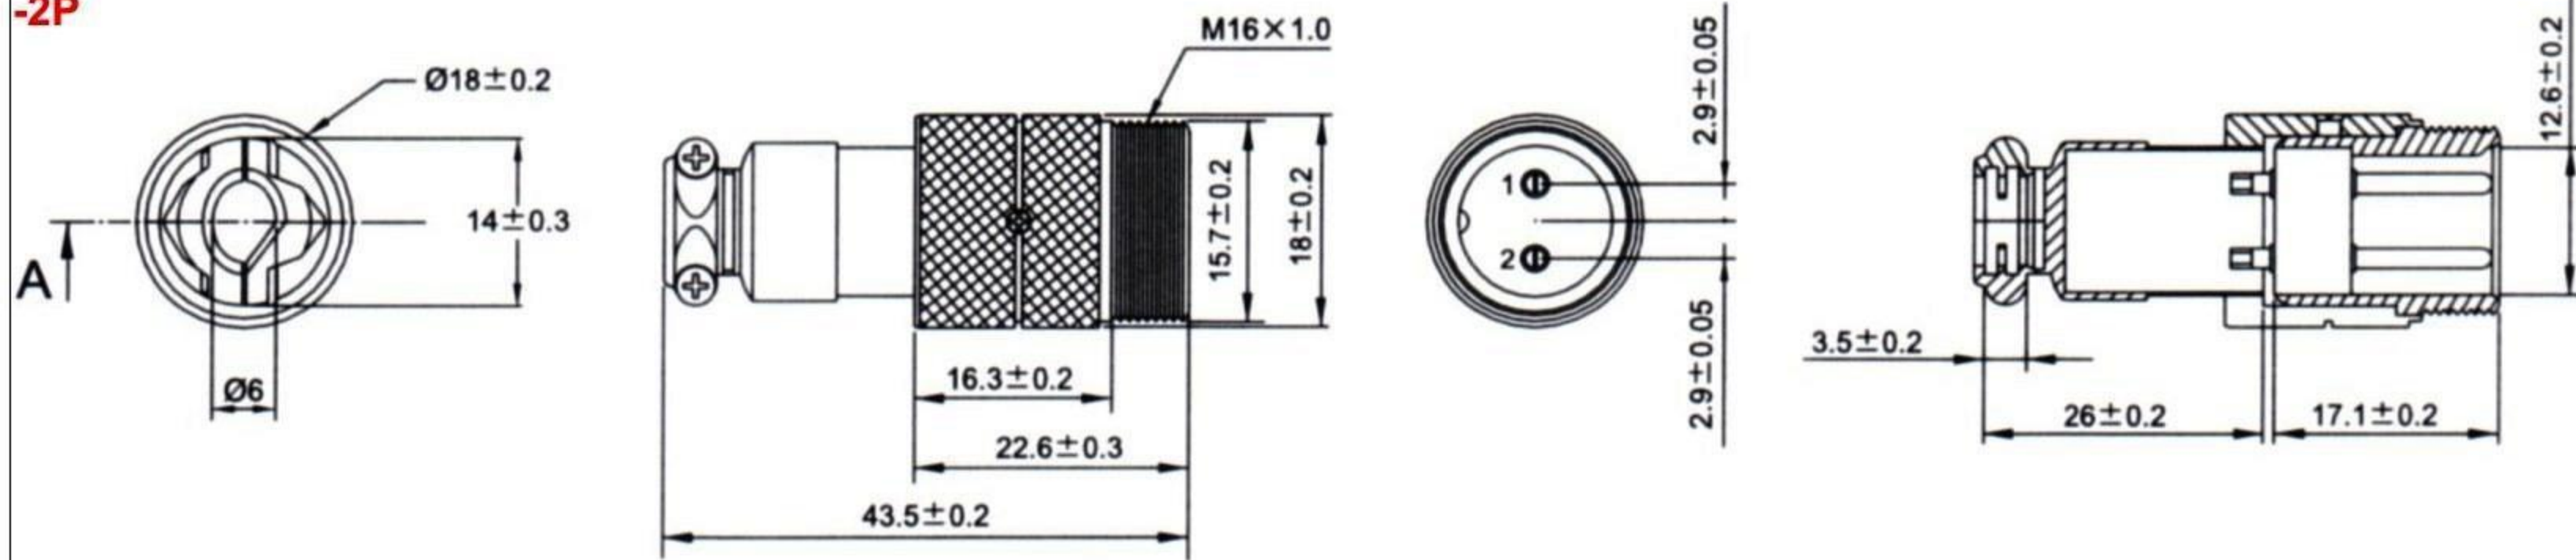








-2P**-3P****-4P****-5P****-6P****-7P****-8P****Key Specifications/Special Features:**

- Contact resistance: 300 Mohms max.
- Insulation resistance: 100 Mohms 250V DC
- Withstanding voltage: 1 min at 250V AC
- Insertion and extraction force: 2 kg f cm max.
- Electrical: 500 cycle's min.
- Terminal strength: 500g cm min

Primary Competitive Advantages:

- International Approvals
- Experienced Technical Staff
- Brand-name Parts
- Product Performance

Spectra Connectronics Pvt. Ltd. HOUSE OF CONNECTOR™		APPROVED BY	SCALE	UNIT
		CHECK BY	PROJ	DR. NO.
PART NO.	7115-XXCM			SIZE
Mini Round Shell Cable Male				DRAWN BY
				A4