


**Key Specifications/Special Features:**

- Contact resistance: 300 Mohms max.
- Insulation resistance: 100 Mohms 250V DC
- Withstanding voltage: 1 min at 250V AC
- Insertion and extraction force: 2 kg f cm max.
- Electrical: 500 cycle's min.
- Terminal strength: 500g cm min

**Primary Competitive Advantages:**

- International Approvals
- Experienced Technical Staff
- Brand-name Parts
- Product Performance

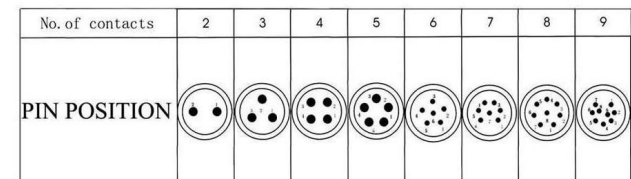

NO. OF CONTACTS	2P	3P	4P	5P	6P	7P	8P	9P
RATED CURRENT/VOLTAGE	7A-125V	7A-125V	5A-125V	5A-125V	4A-125V	4A-125V	4A-125V	4A-125V
WORK VOLT (AC.V)	200	200	200	200	200	200	200	200
DIELECTRIC WITHSTANDING VOLTAGE (AC.V/min)	1500	1500	1500	1500	1500	1500	1500	1500
INSULATION RESISTANCE (M ohm)/500V	1500	1500	1500	1500	2000	2000	2000	2000
CONTACT RESISTANCE (M ohm)/A	10	10	10	10	10	10	10	10



TITLE	Mini Round Shell Female Cable Type			
PART NO.	7115-XXF		DATE	07/26/2006
DRAWING NO.		REV.	A	DRAWN
CUSTOMER P/N		SCALE	FREE	CHECKED
TOLERANCE	.X ±0.2 .XX ±0.15	UNIT	mm	APPROVED