
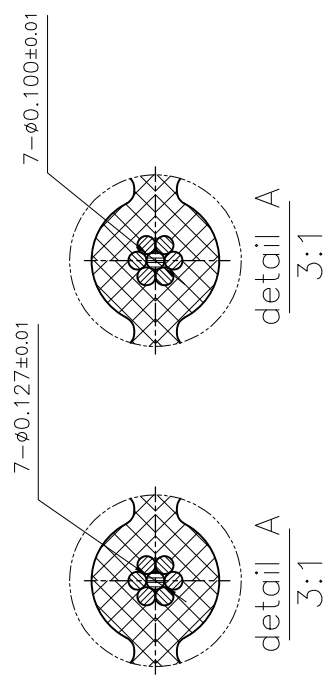
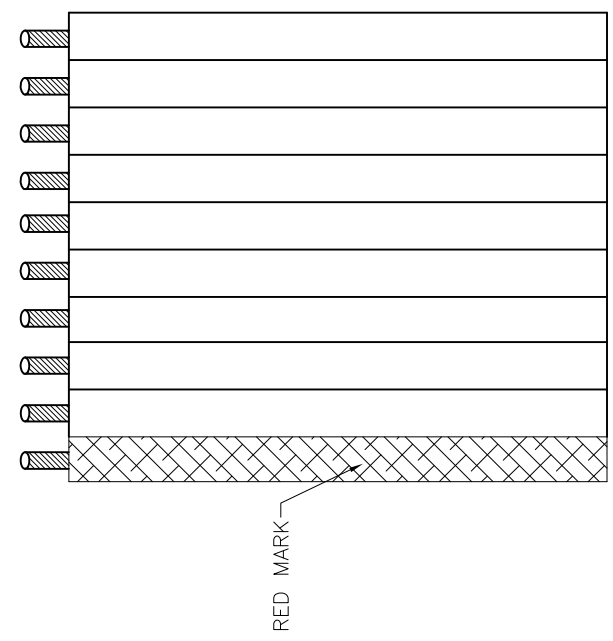


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/18/07	~	

NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG
 - Insulation resistance: 100MΩ/km min.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

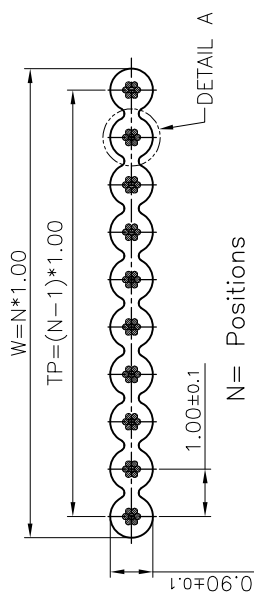

Number	Dimensions		Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	
10	9.00	10.00	±0.30
14	13.00	14.00	±0.30
16	15.00	16.00	±0.30
20	19.00	20.00	±0.30
24	23.00	24.00	±0.30
26	25.00	26.00	±0.30
30	29.00	30.00	±0.30
34	33.00	34.00	±0.40
40	39.00	40.00	±0.40
50	49.00	50.00	±0.40
60	59.00	60.00	±0.40
64	63.00	64.00	±0.40

GENERAL TOLERANCE	ANGLE TOLERANCE	TITLE	PROJECTION
X. ±0.60	X. ±5°	mm	mm
.X ±0.38	.X ±3°	A4	A4
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	UL 2651 PITCH 1.00mm FLAT CABLE	
SCALE	1:1	SHEET	SERIES
DRAWING NO.	1 OF 1		

