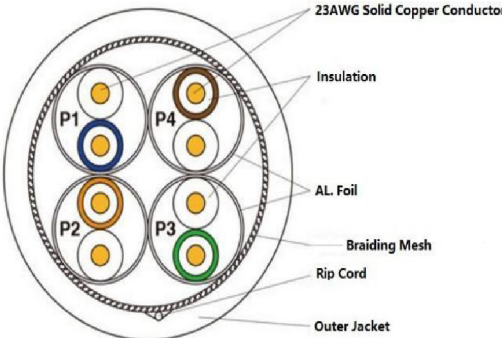



SPECTRA CABLES SFTP 4PR 23AWG CAT7

PRODUCT & SPEC.		8004-C7SFTP (CAT7 SFTP)	CONFIGURATION							
PAIRS		4P								
CONDUCTOR	Configuration	4X2X0.58mm±0.02			<table border="1" data-bbox="1254 449 1496 664"> <tr> <td>P1. Blue/Blue&White</td> </tr> <tr> <td>P2. Orange/Orange&White</td> </tr> <tr> <td>P3. Green/Green&White</td> </tr> <tr> <td>P4. Brown/Brown&White</td> </tr> </table>		P1. Blue/Blue&White	P2. Orange/Orange&White	P3. Green/Green&White	P4. Brown/Brown&White
	P1. Blue/Blue&White									
	P2. Orange/Orange&White									
P3. Green/Green&White										
P4. Brown/Brown&White										
Material	BARE COPPER									
Standard	No Fluke									
INSULATION	Material	HDPE								
	PE OD	Φ1.3±0.05mm								
SHIELDED	Each pairs shielded	Aluminum foil								
	Drain wire	0.5MM CCA								
	Overall braiding shielded	128*0.12mm Aluminum								
SKIN	Material	PVC								
	Color	OEM								
	PVC OD	8.0mm±0.2MM								
	PVC Thickness	0.6±0.02mm								
	PACKAGE	305M/Wooden reel								
PERFORMANCE	DC Resistance 100m.20℃	≤ 9.5Ω/100m max.								
	Resistance Unbalance	≤ 2%								
	Nominal Velocity of Propagation	70%								
	operating temperature(℃)	-20℃~75℃								
PRINTING	SPECTRA CABLES SFTP 4PR 23AWG CAT7 VERIFIED TO EIA/TIA 568B.2&ISO/IEC 11801 001M305M 02/22/2024									