


Product specifications:

1. Rated current: 3AMAX;
2. Rated voltage: 200V/AC;
3. Voltage endurance: AC900V/1 minute;
4. Insulation resistance:1000MΩ(500VDC);
5. Contact impedance:Initial and post test ≤ 20mΩ;
6. Working temperature:- 25℃~+85℃;
7. Wiring specifications: AWG20MAX;
8. Waterproof rating: IP67
9. The product Compliant ROHS

16	Pinch ring	PA66,white	1
15	Seal	NBR Black	1
14	Pressing nut	plastics,black	1
13	Contact	Copper ,gold-plated	2
12	Contact	Copper ,gold-plated	8
11	Spring	stainless steel	1
10	Support	PA66,black	1
9	Body	Zinc with nickel plated	1
8	O-Ring	NBR Black	2
7	Tube	Zinc with nickel plated	4
6	Nut	Zinc with nickel plated	2
5	Shell	Zinc with nickel plated	1
4	Circlip	stainless steel	1
3	O-Ring	NBR Black	1
2	O-Ring	NBR Black	1
1	Insert	PA66,White	1
No.	PART NAME	DESCRIPTION	Q'TY

Seal:

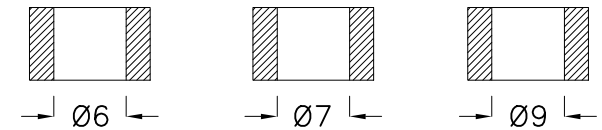

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm

	PART DESCRIPTION: 10 PIN FEMALE ENCODER CONNECTOR				
	P/N: CM10-AP10				
Check:	Date	Scale	Unit	Type	Page
Draw: DING	2023.07.10	Free	MM	Z	1/1