

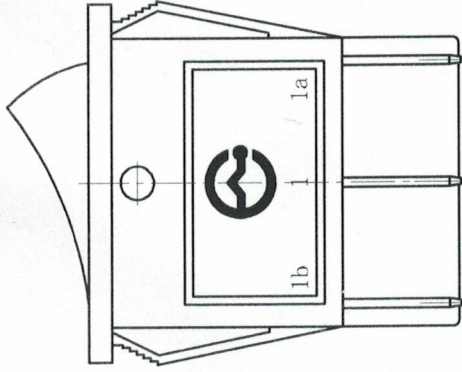


The Main Technology Performance


Item	Parameter
Circuit	
Rated voltage	16A 250VAC
Rated current	20A 125VAC
Insulated resistance	$\geq 100M\Omega$
Contact resistance	$\leq 100m\Omega$
Dielectric strength	$\geq 1500V/min$
Endurance	$\geq 10000$
Ambient temperature	T 55

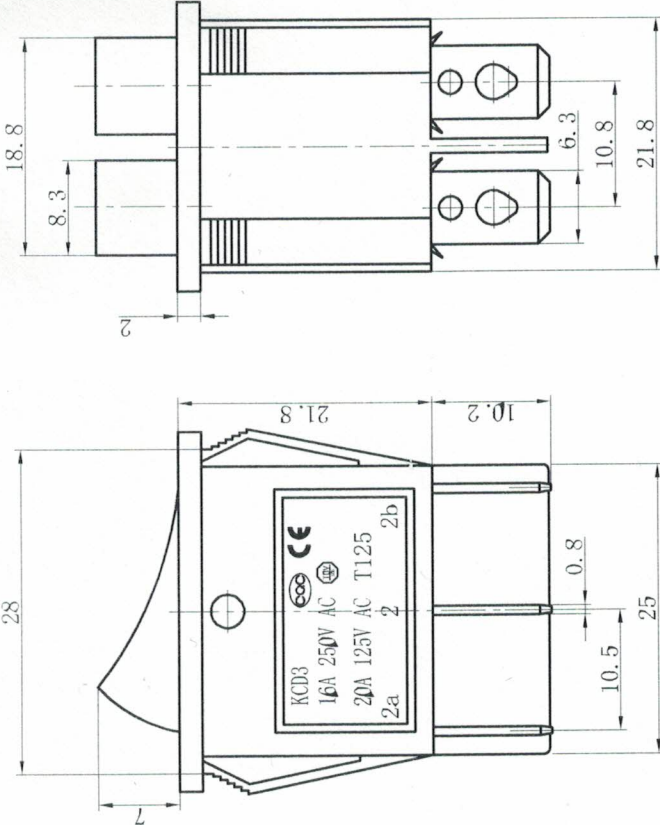

PANEL CUT-OUT

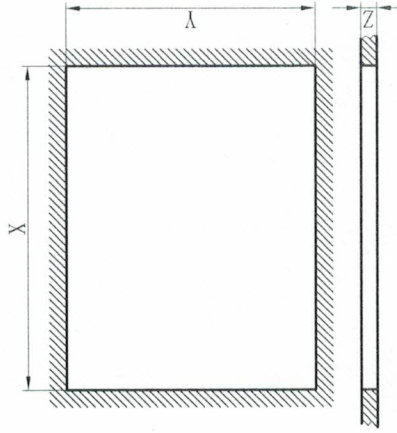

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	27.90~28.10
1.25~2.00	21.90~22.10	28.10~28.30
2.00~3.00	21.90~22.10	28.30~28.50

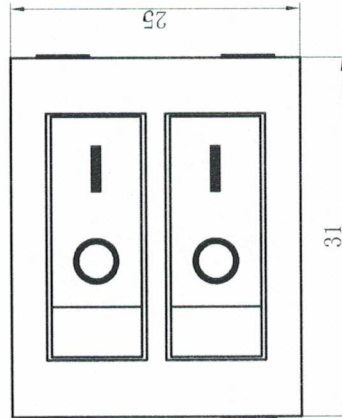

MARK	AMOUNT	MODIFY FILE NO.	CHANGE BY	DATE	GENERAL TOLERANCE	
					SCALE	1.5:1
					UNIT	mm
					WEIGHT	
					ANGLE	$\pm 2^\circ$



THE FIRST ANGLE PROJECTION

ROCKER SWITCHES

DESIGNATION:  
KCD3-201EN