



△ Strain Relief

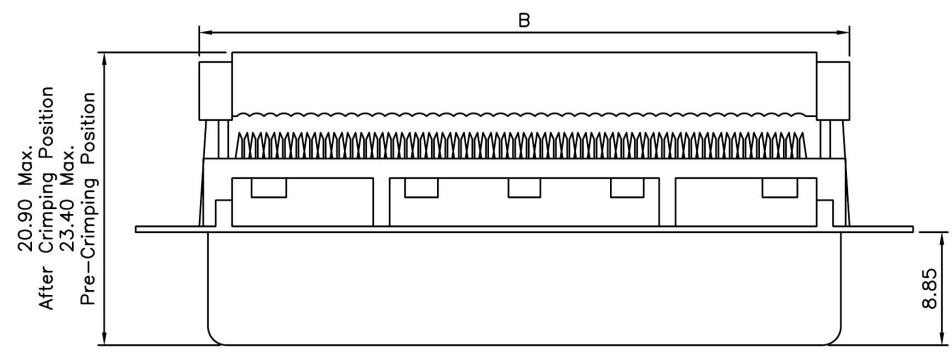

△ SPECIFICATION

Current Rating:1A:AWG28  
 2A:AWG26  
 Insulation Resistance:1000 Megaohms Min.  
 Dielectric Withstanding Voltage:500V  
 Contact Resistance:25 Milliohms Max.  
 Operation Temperature Range:-25°C~+85°C  
 Wire Size:AWG 26 & AWG 28  
 Insulator:PBT+G.F.(UL94V-0),Blue  
 Contact:Phosphor Bronze,Selected Gold Flash Over Nickel  
 Strain Relief:PBT+G.F.(UL94V-0)  
 Shell:Steel  
 RoHS Compliant

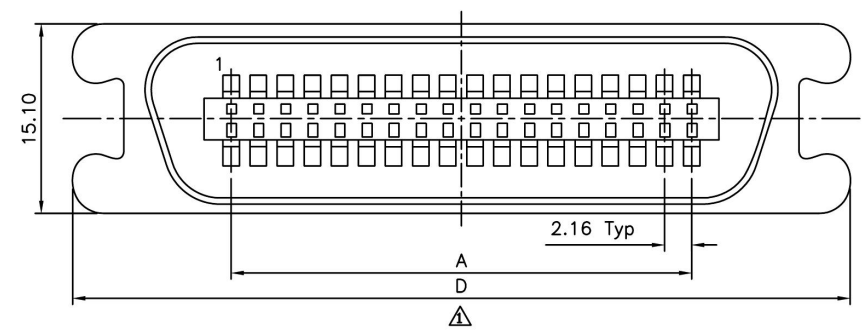

△ Pos.	A±0.13	B±0.25	C±0.25	D±0.25
24	23.76	35.50	37.50	49.30
36	36.72	51.50	53.75	62.00
50	51.84	68.50	70.90	77.40

**Spectra Connectronics Pvt. Ltd.**  
 HOUSE OF CONNECTORS™

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 ANG. ±1°					
PART No. 7023 XX		CHECKED BY			△ A1			08/25/2010	
DRAWING No.		DRAWING BY			△ A0	NEW RELEASE			
SCALE	NONE	REV.	A1		UNIT	mm		NO.REV.	REVISIONS