


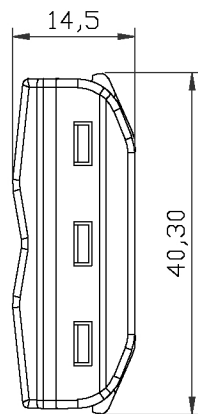
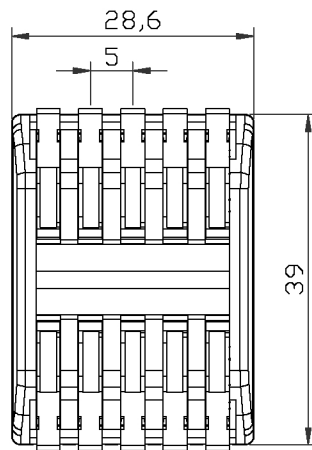




Product NO.					
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	First issue		2023.02.01		
part number		PCT-2-5			
product name		terminal blocks			
rated voltage		250V			
rated current		32A			
welding range		rigid line 0.08-4.0mm <sup>2</sup> flexible line 0.08-2.5mm <sup>2</sup>			
stripping lengt		9-10mm/0,39in			
oper. temp		-20°C~105°C °			
hole location		5			
plastic material		FRN			
contact material		red copper			
spring		SUS			



-TOLERANCES- UNLESS OTHERWISE SPECIFIED	PART DESCRIPTION: 5 POLE WIRE CONNECTOR WITH SPRING LOCK LEVER				
	Appr:	P/N: RHT-5W			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.00±0.05mm 0.0±0.10mm 0 ±0.20mm	Check:	Date	Scale	Unit	Type
	Draw:	2023.02.01	Free	MM	Z
					Page
					1/1

No.	PART NAME	DESCRIPTION	Q'TY
1			
2			
3			